




A-key to better communications.

# EIP-200

## SVGA Ultraportable DLP™ Projector

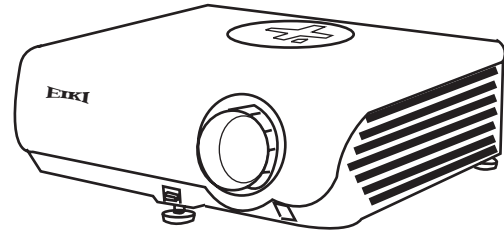

EIP-200

### KEY FEATURES: Model EIP-200

- 2000 ANSI Lumens, 85% uniformity, and 2000:1 contrast ratio.
- DLP™ imaging technology delivers a "seamless" high contrast image.
- True SVGA resolution. SXGA+, SXGA, XGA, SVGA, VGA & MAC compatible.
- Smart data compression / expansion, and video scaling.
- Convenient manual zoom and focus lens.
- Preset image offset. Vertical digital keystone correction.
- Settings for Standard, Presentation, Movie, Game, and sRGB operation.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- Supports most HDTV resolutions.
- Sealed Optics: no air filter to maintain.
- Extremely quiet: operating noise only 30 dBA in Eco mode.
- System Lock function. Keylock function.
- Menu Driven Help System. Power Management function.
- Wireless remote control.
- 3 Year\* Projector Warranty!

**Included Accessories:** Owner's manual. Quick guide. AC Power Cord. Lens Cover. VGA-type Computer Input Cable (HD15~HD15). Wireless Remote Control and Batteries (2 x AA). Component Video Input Cable (HD15~3-RCA). RS-232 Control Adapter (DB9~9-pin DIN).

**Optional Accessories:** Replacement Lamp. Ceiling Mount. Ceiling Post and Plate. ATA-Style shipping case with Wheels & Telescoping Handle. EZ-250 Local Control. NPC-1 Network Control.

### SPECIFICATIONS: Model EIP-200

Screen Brightness	Standard, 2,000 / Eco 1,740 ANSI Lumens	Video: Resolutions Supported	
Illumination Uniformity	85%	SDTV	480i, 540p, 576i
Size of Color Palette	16.7 Million	EDTV	480p, 576p
Contrast Ratio	2000:1 (Full ON/OFF)	HDTV	720p (50/60), 1035i (50/60), 1080i (50/60)
Horizontal Resolution	520 TV Lines (DTV 720p)	Signal Inputs:	
Projection Lamp	275 Watt SHP	1. Computer / Component (with breakout cable)	HD15 x 1
Estimated Lamp Life	Standard, 2,000 / Eco 3,000 Hours of Use	2. Computer / Component (with breakout cable)	HD15 x 1
Imaging System	0.55 in. DDR SVGA DMD™	plus Audio: shared - inputs 1 & 2	Stereo: MiniStereo x 1
Color System	4-Segment, 3X speed color wheel	3. S-Video	S-Video x 1
Screen Pixels	(800 x 600 ) in stripe configuration	4. Composite	RCA x 1
Total Pixels	480,000	plus Audio: shared - inputs 3 & 4	Stereo: RCA x 2 (L&R)
Lens Type	Manual Zoom and Focus	Signal Outputs:	
Lens Specs	Speed: f:2.4~2.6; FL: 0.75~0.86in. (19~21.9 mm)	Computer / Component shared between input 1 & 2	HD15 x 1
Lens Ratios	Zoom Range: 1.15:1; Throw:Width: 1.72~1.99:1	plus Audio: shared - inputs 1 & 2	Stereo: MiniStereo x 1(variable)
Image Diagonal	40~300 in. (102~762 cm)	Audio: Amplifier	Mono:2 Watt
Image Width	2.67~20 ft. (0.81~6.1m.)	Audio: Built In Speakers	1.6 x 1.1 in. (4 x 2.85 cm) oval x 1
Throw Distance	4.6~39.8 ft. (1.4~12.2 m.)	Operating Noise	33 dBA Standard / 30 dBA in Eco mode
Front Elevation / Maximum Tilt	up to 8° up	Cabinet Size (HxWxD)	4.3 x 12.4 x 11.0 in. (109 x 315 x 280 mm.)
Anti Keystone	Fixed Image Offset 110.5% of Image Height, up	Overall Size (HxWxD)	4.7 x 12.4 x 11.6 in. (120 x 315 x 295 mm.)
Vertical Keystone Correction	Digital: up-to 13° up or down	Weight	8.6 lbs. (3.9 kg)
Scanning Frequency	Auto: H Sync. 15-70 kHz; V Sync. 43-85 Hz	Packaged Size	10.7 x 17.4 x 18.1 in. (272 x 441 x 459 mm)
Dot Clock	12~108 MHz	Packaged Weight	16.3 lbs. (7.4 kg)
Image Orientation	Normal, Reversed, Inverted	Power Requirements	100-240V AC, 50/60Hz
Local Control / Power Management	Full Function / Auto Shut-Off	Power Consumption / Heat	350 W / 922 BTU/hr / (233 Kcal/hr)
Remote Projector Control	Wireless (Infra Red) x 1	Power Consumption / Heat - Eco	196 W / 669 BTU/hr / (169 Kcal/hr)
RS-232 Control Port	Mini DIN 9 Pin x 1	Power Cord	6' (1.8M) Type 3, Detachable
Computer Native Resolution	800 x 600 (SVGA)	Safety Compliance	UL / cUL Listed
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA, VGA & MAC 13 ~ 21	Security Facilities	Kensington® Security Slot
Computer: Formats	1400x1050 through 640 x 480	Operating Temperature	41~95°F (5~35°C)
Computer: Image Sizing	Normal, or Smart Compressed or Expanded	User Maintenance	Clean Air Intake, Replace Lamp
Video: Color Systems	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	Warranty: Projector	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Video: Aspect Ratios Supported	4:3 and 16:9	Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata
Video: Image Sizing	Video Scaling Technology		* Whichever occurs first

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2005 Eiki International, Inc. Issued September 12, 2005.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com  
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>